



INSTALLATION INSTRUCTIONS FOR PART 99-7340B

APPLICATIONS 2011 KIA SORENTO

99-7340B




KIT FEATURES

- DIN Head unit provisions with pocket
- ISO DIN Head unit provision with pocket
- Painted Matte Black to Match Factory



KIT COMPONENTS

- A) Radio Housing
- B) ISO Brackets
- C) ISO Trim Plate




WIRING & ANTENNA CONNECTIONS (Sold Separately)

- 70-7303 2009-Up Kia/Hyundai Harness
- 40-K111 2007-Up Kia Antenna Adapter

TOOLS REQUIRED

- Panel Removal Tool
- Phillips Screwdriver
- Socket Wrench



METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION



INSTALLATION INSTRUCTIONS FOR PART 99-7340B

TABLE OF CONTENTS

DASH DISASSEMBLY

- 2011 KIA SORENTO 1-2

KIT ASSEMBLY

2011 KIA SORENTO

- DIN HEAD UNIT PROVISION 3
- ISO DIN HEAD UNIT PROVISION 4

CAUTION: Metra recommends disconnecting the negative battery terminal before beginning any installation. All accessories, switches, and especially air bag indicator lights must be plugged in before reconnecting the battery or cycling the ignition.

***NOTE:** Refer also to the instructions included with the aftermarket radio.



KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.






Metra recommends MECP certified technicians

99-7340B DASH DISASSEMBLY

2011 KIA SORENTO

- 1** Remove Shifter knob. (Fig. A)
- 2** Remove the shifter surround panel. (Fig. B)
- 3** Remove panel under the heater & A/C controls. (Fig. C)

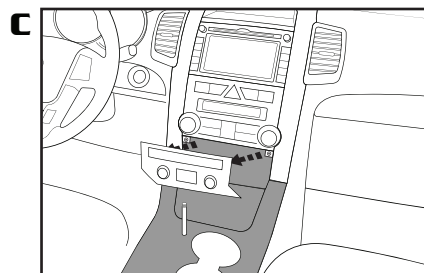
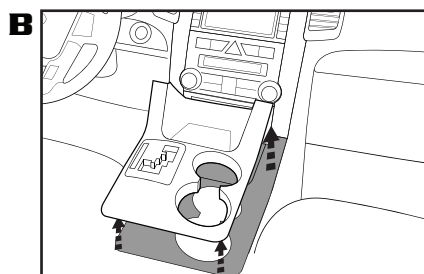
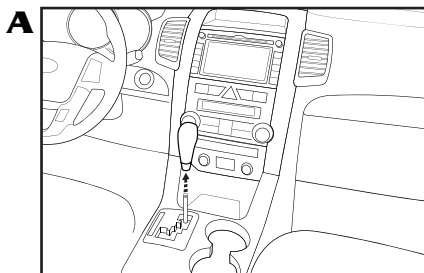


Continued on Pg. 2

99-7340B DASH DISASSEMBLY

2011 KIA SORENTO

- 4** Remove (2) Phillips screws from bottom and remove center fascia panel. (Fig. D)
- 5** Remove (4) Phillips screws securing the heater & A/C controls. (Fig. E)
- 6** Remove (4) Phillips screws securing the radio. (Fig. F)

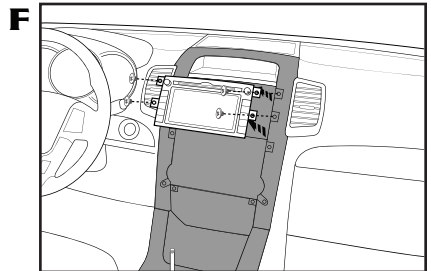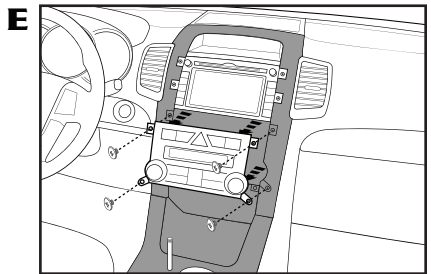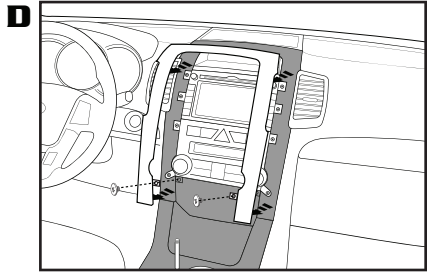



Continue to kit assembly.....



99-7340B KIT ASSEMBLY

DIN HEAD UNIT PROVISION



- 1** Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Fig. A)
- 2** Snap the pocket into the bottom opening of the radio housing. (Fig. B)
- 3** Slide the aftermarket head unit into the cage and secure. (Fig. B)
- 4** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 5** Reassemble dash in reverse order of disassembly.

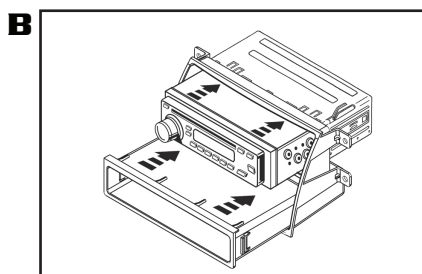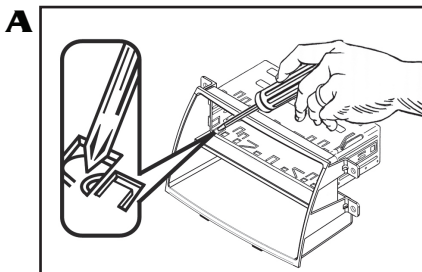

99-7340B KIT ASSEMBLY

ISO DIN HEAD UNIT PROVISION

- 1** Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Fig. A)
- 2** Slide the head unit into the radio opening until the side clips engage. (Fig. B)
- 3** Snap the Trim plate into the Radio Housing. (Fig. B)
- 4** Locate the factory wiring harness and antenna plug in the dash. Metra recommends using the proper mating adapters from Metra and/or AXXESS.
- 5** Reassemble dash in reverse order of disassembly.

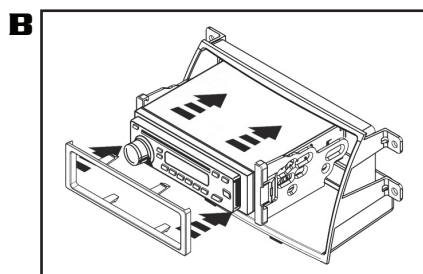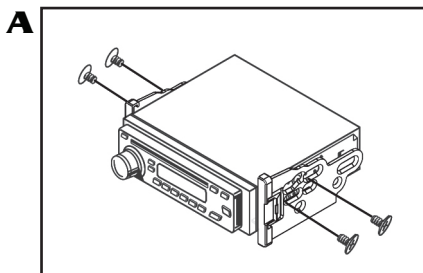



INSTALLATION INSTRUCTIONS FOR PART 99-7340B

REV. 6/28/2010

METRA. THE WORLD'S BEST KITS.™



1-800-221-0932



metraonline.com

© COPYRIGHT 2004-2010 METRA ELECTRONICS CORPORATION